


ADVANCED EVC DUAL

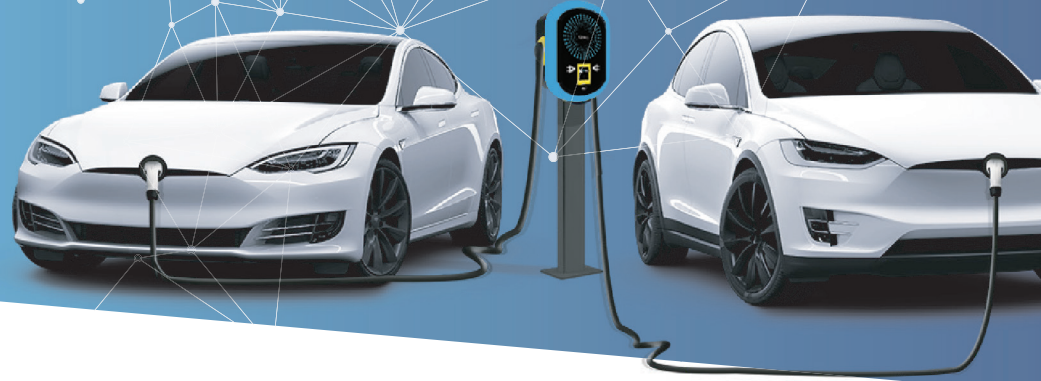

EV METER

A smart, level-2 public charging station designated for hotels, shopping centers, parking lots, workplaces, municipalities and more...

This universal charging station is equipped with a built-in card reader that accepts every major payment method including debit and credit cards, digital wallets, QR codes, prepaid, NFC and more. Advanced EVC's smart, secure and feature-rich solution enables businesses to take initiative and maximize their revenue.

FEATURES

- **Open Payment System** – Accept any type of payment
- **24/7 Monitoring** – Real-time event notifications and remote software updates
- **Dual Port** – Allow two cars to charge simultaneously and maximize profit
- **Easy Installation** – Quick to deploy in any location
- **OCPP Supported** – Manage the charging station by using HIVE or any other management platform
- **High-Performance** – Maximum 12kW power output per socket
- **No App Required** – Just present payment and plug in the charger

APPLICATIONS & USES



Mixed usage facilities



Municipal properties



Airports, other transport facilities



Shopping malls



Hotel, valet, event operations



Residential, commercial complexes



Sport arenas, convention centers



University, medical campuses



ELECTRICAL DATA

AC Power Supply	2X(L1 + L2/N + PE)
AC Input Voltage	110-240 VAC +/- 10%, 50-60Hz
AC Output Voltage	110-240 VAC +/- 10%, 50-60Hz
Maximum Input / Output Current	50Amax
Maximum Input / Output Power	2X12kW
Number of Plugs	Two

COMMUNICATION

Interface Protocol	OCPP 1.6 Supported
Wireless Connection	4G

SUPPORTED PAYMENT SCHEMES

Debit & Credit Cards	Swipe, contact, contactless, EMV chip cards
Mobile & NFC Payments	Google Pay, Apple Pay, Swish and more
Prepaid cards & closed environments	Alipay, WeChat Pay and others

SAFETY AND PROTECTIONS

Safety Protections	Electronic RCD 30mA AC Electronic 6mA DC Fault current detection
Power Limit Control	Mode 3 PWM control according to UL-2594
Type 1 Socket Protection	J-1772 Type 1 connector
Available Connections	Type1 Plug, 16.4ft cable

ENCLOSURE & ENVIRONMENTAL CONDITIONS


IP Rating	IP55
Enclosure Protection Rating	IK10
Payment Terminal Impact Protection	IK8
Enclosure Material	PC + UV
Operating Temperature	(-25°C) to (+55°C)
Ambient Temperature Storage	(-30°C) to (+70°C)
Status LEDs	Yes
Light Beacon	RGB color indicator
Built-in Energy Meter	Yes

WEIGHT & DIMENSIONS

(W x H x D)	365 x 520 x 266 mm, 15kg
-------------	--------------------------

STANDARDS & CERTIFICATIONS

ROHS
REACH

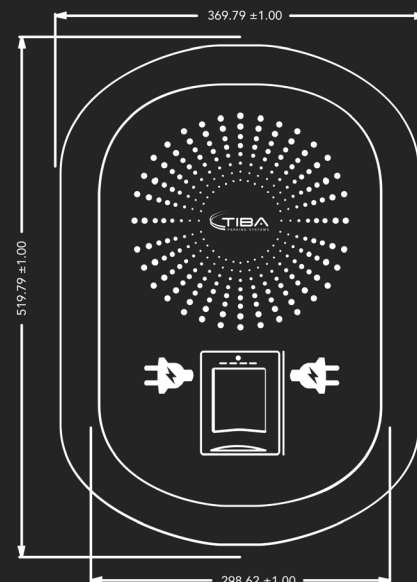

A Brand of FAAC Technologies
www.tibaparking.com

USA

2228 Citygate Drive, Columbus, Ohio 43219
T. +1 614 328 2040 • F. +1 614 864 2153

ISRAEL

17 Ha-Mefalsim Street, Petah-Tikva 4951251
T. +972 3619 9777 • F. +972 3 905 4306

As part of our commitment to continuous product improvement, FAAC SpA and its subsidiaries and affiliates ("FAAC") reserve the right to make technical changes to this publication without notice. All rights are reserved and reproduction, in any form or by any means, of the whole or any part of this publication is prohibited without the prior written consent of FAAC SpA. All trademarks and logos used that are not the property of the FAAC SpA group belong to their respective owners. All rights are reserved. 08/2022